




ATEX informazioni - informations

IT. La sicurezza negli ambienti esplosivi

La direttiva ATEX è divenuta un requisito obbligatorio in tutta la CEE dopo il 1° Luglio 2003 per tutte le attrezzature, elettriche e meccaniche, destinate ad essere utilizzate in una zona pericolosa. Atmosfere potenzialmente esplosive esistono dove c'è il rischio di scoppio dovuto a miscele di gas/aria, vapore/aria, polvere/aria o altre combinazioni infiammabili, tipiche dei vapori di benzina. Qualora il materiale elettrico o meccanico dovesse essere utilizzato in aree con atmosfera esplosiva deve essere progettato e costruito in modo da non creare/eliminare le fonti d'innesco quali scintille, superfici calde o elettricità statica, tutte fonti di combustione in grado di accendere queste miscele. Le zone di rischio per ambienti con presenza di gas e vapori infiammabili possono andare dalla ZONA 0 (il rischio di esplosione è continuo), alla ZONA 1 (il rischio di scoppio è probabile), alla ZONA 2 (rischio improbabile e se si presenta una possibilità di deflagrazione, persiste solo per breve periodo).

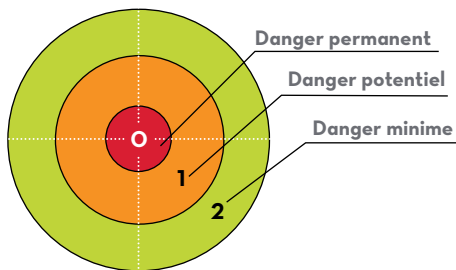

Group	Category	Type of explosive atmosphere	permanent prefix	protection method			gas class			temperature class		equipment protection level
				db	h		IIB	T4	T6			
II	2	G	Ex									Gb
				Benz 50	Benz 75	Benz Flow		Benz 50	Benz 75	Benz Flow		

II = Il gruppo II comprende gli apparecchi destinati a essere utilizzati in altri ambienti (diversi da miniere) in cui vi sono probabilità che si manifestino atmosfere esplosive
 2 = Elevata protezione, Categoria 2 per ZONE 1 GAS e ZONE 2 GAS
 G = Gas
 Ex = Equipaggiamento a prova di esplosione certificate secondo le direttive Europee ATEX
 d = custodia a prova di esplosione (EN 60079-1)
 IIB = Apparecchiature elettriche per atmosfere potenzialmente esplosive diversi delle miniere. (etilene etc.)
 T4 = La temperatura della superficie della pompa non supererà i 135°C.

EN. Safety in explosive environments

As of 1st July 2003, the ATEX directive came into force throughout the EEC. This directive became an obligatory requirement for all electrical and mechanical equipment intended for use in dangerous areas. Potentially explosive atmospheres exist where there is a risk of explosion due to mixtures of gas and air, steam and air, dust and air or other flammable combinations typical of petrol vapours. If the electrical or mechanical material must be used in areas where there is an explosive atmosphere, it must be designed and built so as not to create/ to eliminate sources of ignition such as sparks, hot surfaces or static electricity and all sources of combustion able to ignite these mixtures. Risk areas for environments where gas and flammable vapours are present can range from AREA 0 (constant risk of explosion) to AREA 1 (risk of explosion probable) and AREA 2 (low risk and any risk of explosion persists for a short time only).

II = Group II comprises appliances intended for use in other environments (other than mining) in which explosive atmospheres are probable.
 2 = High protection, Category 2 for AREA 1 GAS and AREA 2 GAS
 G = Gas
 Ex = Explosion-proof equipment certified according to the European ATEX directives
 d = explosion-proof cases (EN 60079-1)
 IIB = Electrical appliances for potentially explosive environments other than mining. (ethylene etc.)
 T4 = The temperature of the pump will not exceed 135°C.





BENZ FLOW



CARATTERISTICHE	Ex BENZ FLOW 3C
Sistema di misura:	Disco oscillante
Grado di protezione:	IP55
Parziale [cifre]:	3
Totalizzatore [cifre]:	6
Unità di misura:	litri
Portata min [l/min]:	20
Portata max [l/min]:	120
Utilizzabile per gravità:	Sì
Calibrazione:	Sì
Pressione Max [bar/psi]:	3,5/50
Precisione[%]:	± 1
Ripetibilità [%]:	0,3
Posizione uscita:	Alta
Entrata/Uscita [BSP/G]:	Flangia 1" F
Materiale corpo:	Alluminio
Marcatura ATEX:	II 2 G Ex h IIB T6 Gb
Materiale O-Ring:	Viton
Temperatura di utilizzo min/max [°C]:	-10 / +60
Fluidi consentiti:	Diesel, Benzina, Kerosene, miscele di benzina/alcool (max 15%), avgas 100/100LL, jet A/A1, aspen 2/4
Fluidi non consentiti:	Gas, Alcool, Acqua
Rumorosità [dBA]:	< 70
Peso netto [Kg]:	0,6
Dimensioni singolo imballo [mm]:	l 220 x b 150 x h 220
Peso lordo [Kg]:	1





BENZ FLOW





FEATURES	Ex BENZ FLOW 3C
Measuring system:	Oscillating disk
Protection:	IP55
Partial [digits]:	3
Totalizer [digits]:	6
Unit of measure::	litre
Min flow rate [l/min]:	20
Max flow rate [l/min]:	120
Suitable for gravity:	yes
Calibration:	yes
Pressure Max [bar/psi]:	3,5/50
Precision [%]:	± 1
Repeatability [%]:	0,3
Outlet position:	high
Inlet/Outlet [BSP/G]:	Flanged 1" F
Body material:	Alluminium
ATEX marking:	II 2 G Ex h IIB T6 Gb
O-Ring material:	Viton
Min/Max Temperature [°C]:	-10 / +60
Allowed fluids:	Diesel, Gasoline, Kerosene, gasoline / alcohol mixtures (max 15%), avgas 100/100LL, jet A/A1, aspen 2/4
Forbidden fluids:	Gas, Alcohol, Water
Noise level [dBA]:	< 70
Net weight [Kg]:	0,6
Single size packaging [mm]:	l 220 x b 150 x h 220
Gross weight [Kg]:	1





BENZ FLOW

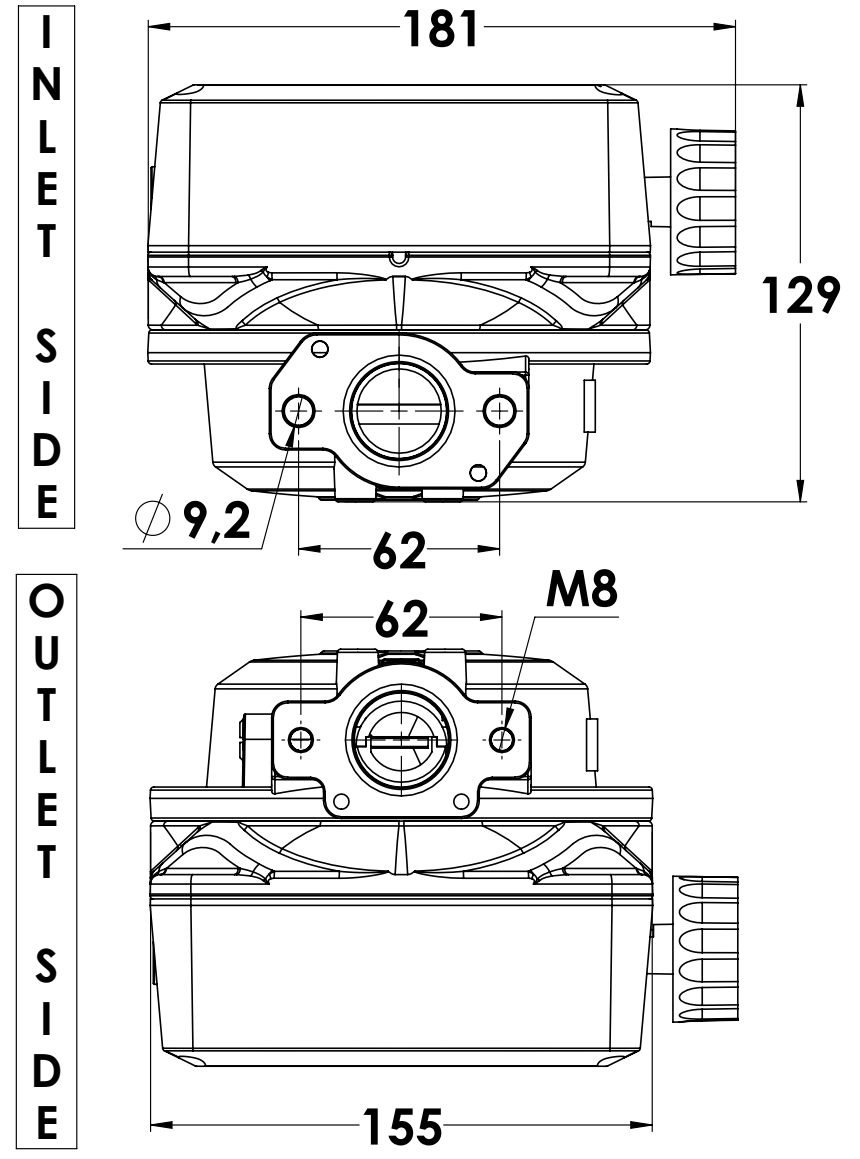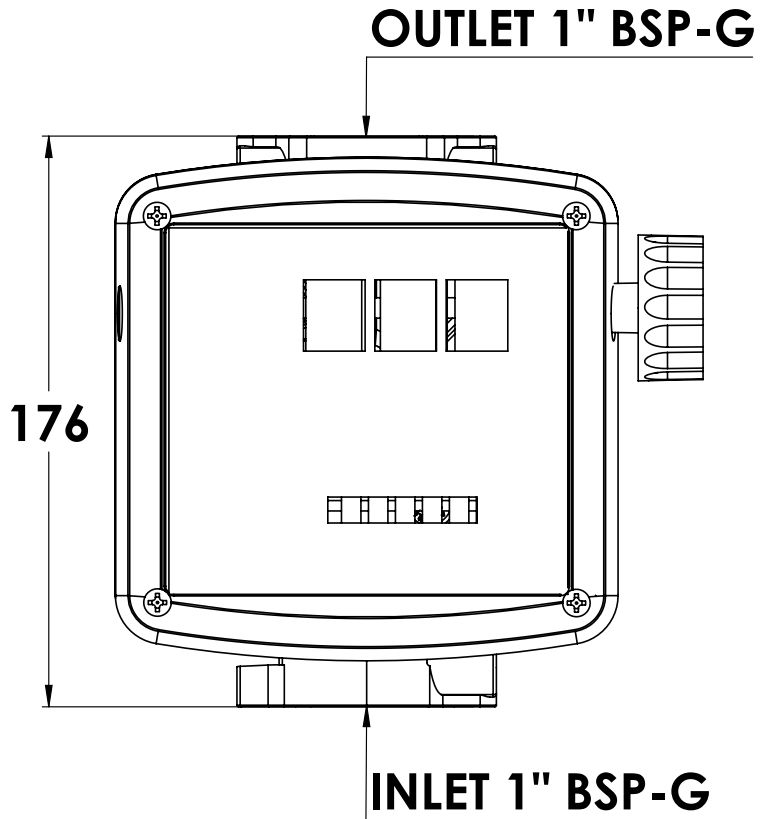

tutte le dimensioni espresse in mm - all dimensions are in mm

